
22.5mm Ultra-thin Products

Open a new horizon



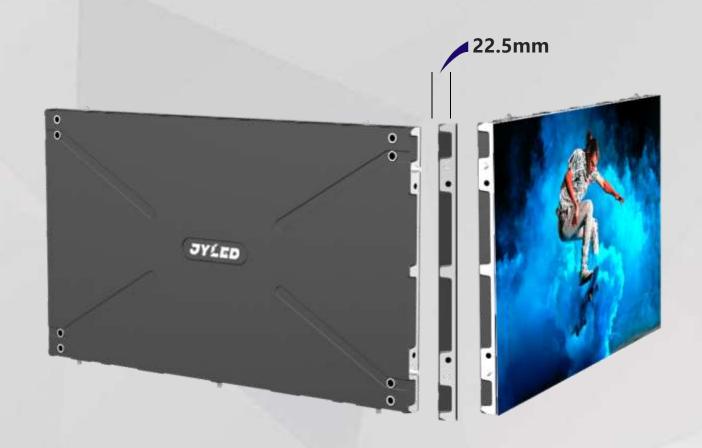

Product specifications

◆ 22.5mmUltra-thin products

◆ Perfect visual effect/specification serialization

Ultra-thin Small PitchLED Screen

◆ Power signal double backup

◆ Bracket installation & wall installation

◆ Product packaging



	Produc	t specifications			
Product specifications	P0.9375	P1.25	P1.5625	P1.875	
Module size	300mm*168.75mm				
Module resolution	320*180	240*135	192*108	160*90	
Cabinet resolution	640*360	480*270	384*216	320*180	
Cabinet	600mm*337.5mm				
Maintenance	Front-maintenance				
Grayscale	14-16bit+			Dt V	
Circuit scheme	Common cathode circuit		Common anode circuit	7.6	
Driver Mode	Constant current drive				
Brightness	300-800nit				
Refresh rate	3840Hz				
Viewing angle	Horizontal 160° / Vertical 140°				
Power requirements	Wide voltage AC 100-240V Ultra-thin PFC power supply				
Compatible function	Redundant backup of power supply/receiving card				
Maximum power consumption (per cabinet)	<120w				
Average power consumption (per cabinet)	<40w				
Certification	CCC,ISO9001,FCC,CE,ROSH				



22.5mm Ultra-thin products

Small space, high value







Product Features



Perfect visual effect

High refresh, high grayscale, high contrast





Product serialization

Multi-pitch compatibility:0.9375/1.25/1.5625/1.875










Product Features



Power signal double backup

Safe and stable

Adapt to various occasions

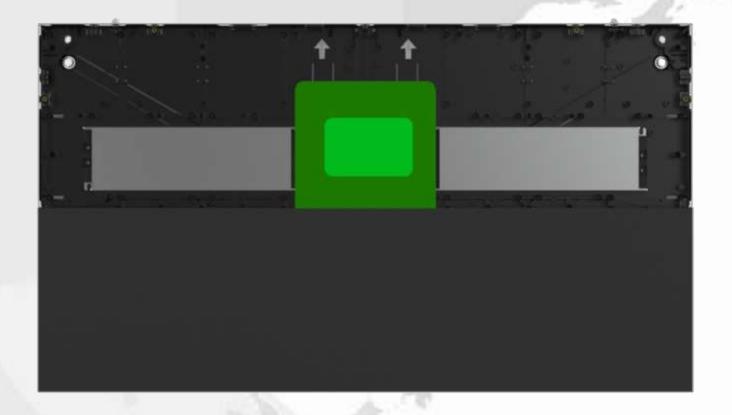

Bracket installation & wall installation



Bracket installation



Wall installation



Product packaging



Elevator-accessible packaging

Elevator width: 2.2m

Maximum packaging length: 2.1m



1. J	108' / 135' / 162' / 216' packaging			
Items	Material	L*W*H (mm)	Package Including	
Module packaging	Carton	700*440*355	32 modules/cts	
Cabinet packaging	Carton	680*200*420	2 cabinets/cts	
135'and 162' Bracket packaging	Wooden case	2150*800*500	Bracket + integrated box + back strip	
108' Bracket packaging	Wooden case	1950*800*500	Bracket + integrated box + back strip	

About us



Capacity: monthly patch capacity of lamp beads over 1000KK.

Production line: At present, the company has six automatic production equipment lines for SMT placement machines and modern electronic production assembly lines.









Factory area: The plant area is more than 5,000 square meters, and there are nearly 100 employees. The screen area can be aging more than 600 square meters at the same time

Equipment: 4 sets of Yamaha placement machines, 12 sets of placement machines such as Panasonic and Samsung, and matching automatic solder paste detector, two sets of first-line brand reflow soldering





Website: www.szjy-led.com

Contact: +86 18194008750 / 0755-32919066

E-mail: sale20@sz-ledscreen.com

Address: Shiyan Town, Baoan District, Shenzhen