


Fine Pitch LED Display



Features

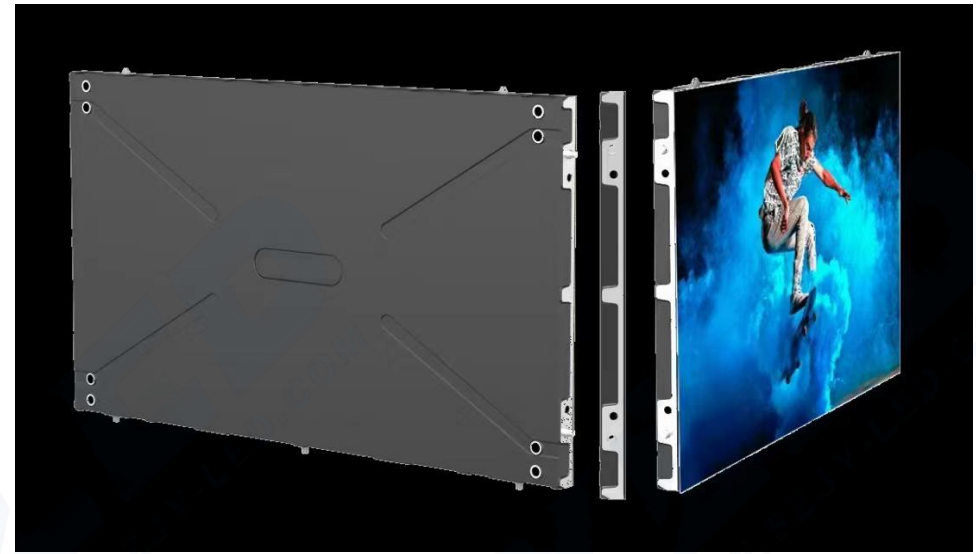

1. Magnetic installation, front maintenance operation, easy to operate.
2. Ultra-lightweight box, convenient for transmission and portability.
3. The wide color gamut ensures uniform and bright colors, creating a delicate and soft picture without damaging the LED.
4. 3840Hz refresh rate, providing real, natural image display without block shadows.
5. Seamless splicing, providing higher flatness and excellent visual effects in a variety of indoor applications.
6. 16:9 aspect ratio ensures easy setup and offers standard 2K, 4K and 8K resolutions.

Specification

Model	P0.9375	P1.25	P1.538	P1.56	P1.667	P1.86
Pixel Pitch	0.9375mm	1.25mm	1.538mm	1.56mm	1.667mm	1.86mm
Pixel Density	1137777dot/m ²	640000dot/m ²	422500dot/m ²	409600dot/m ²	360000dot/m ²	288369dot/m ²
LED Lamps	0.93 4 in 1	1010RGB	1212RGB			1515RGB
Module Size	300 x 168.75mm	300 x 168.75mm 320 x 160mm	320 x 160mm	300 x 168.75mm	320 x 160mm	320 x 160mm
Module Resolution	320 x 180dots	240 x 135mm 256 x 128mm	640 x 480dots	192 x 108dots	192 x 96dots	172 x 86dots
Cabinet Size	600 x 337.5mm	600 x 337.5mm 640 x 480mm	640 x 480mm	600 x 337.5mm	640 x 480mm	640 x 480mm
Driver Mode	/	1/45 Scan/1/64 Scan	1/52 Scan	1/48 Scan	1/48 Scan	1/43 Scan
Cabinet Material	Die cast aluminum					
Brightness	600-1000cd/m ²	600-1200cd/m ²				
Max Power Consumption	720W/m ²					
Average Power Consumption	240W/m ²					
Refresh Rate	3840Hz					
Grey Level	16Bit					
Certifications	CE, ROHS, ISO9001					
View Angle	Horizontal 140° Vertical 140°					
Screen Control Method	PC or Mobile Phone					
IP Rating	IP31					
Input Voltage	AC110V-220V,50Hz-60Hz					
Temperature-operating	-10°C-60°C					
Life Span	≥100,000 Hours					

References



References

